

FIG. 1

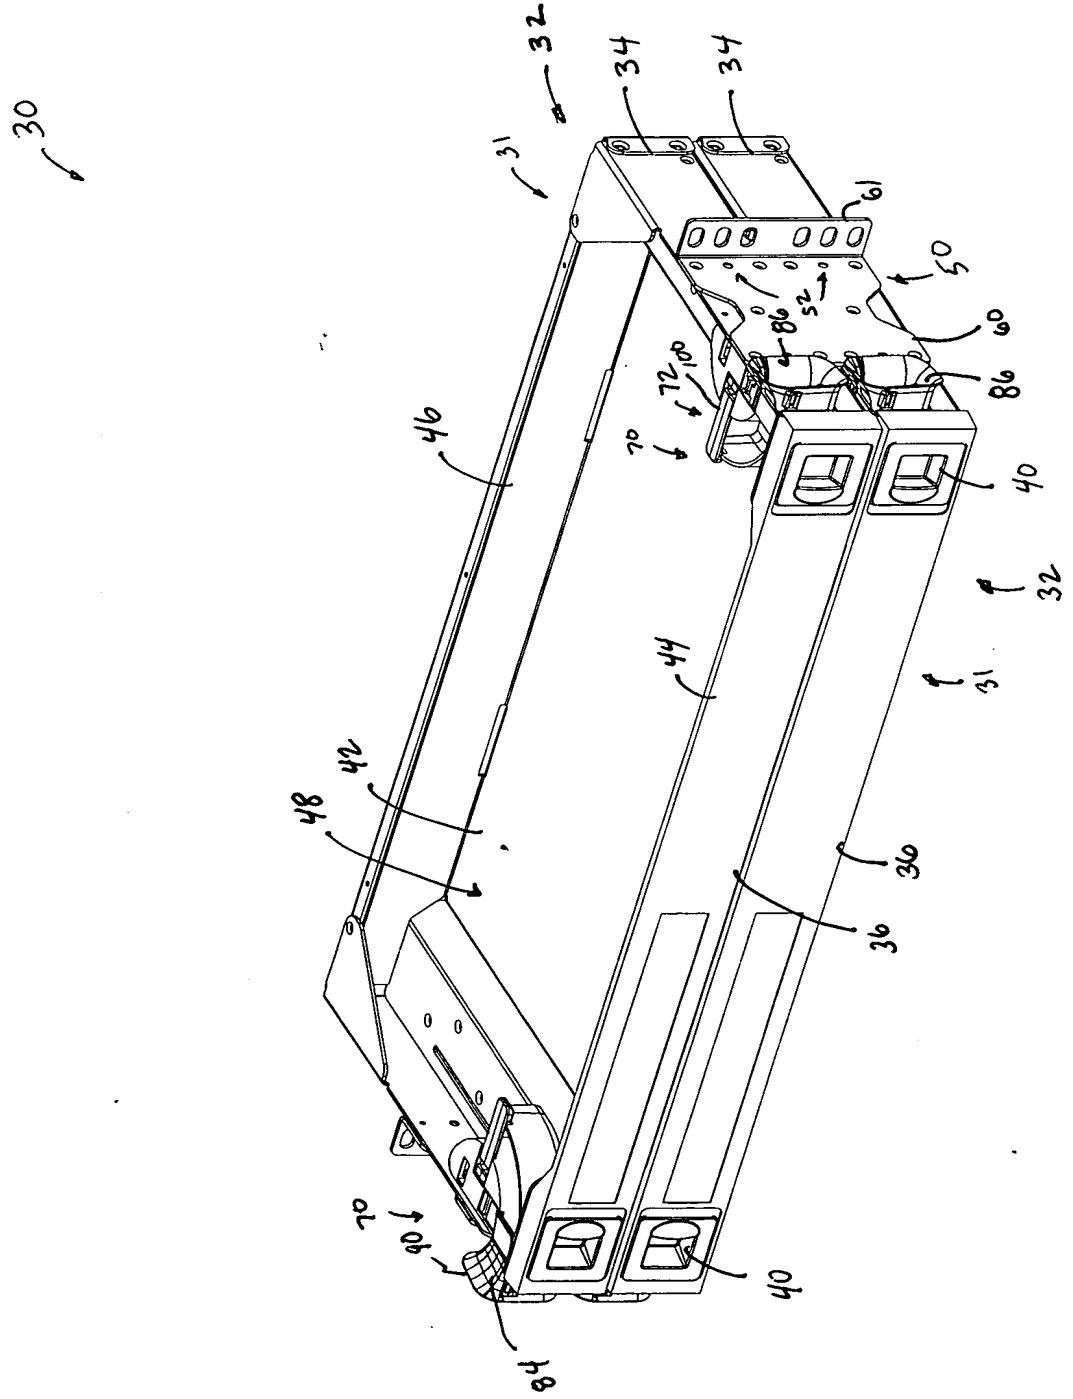


FIG. 1

FIG. 2


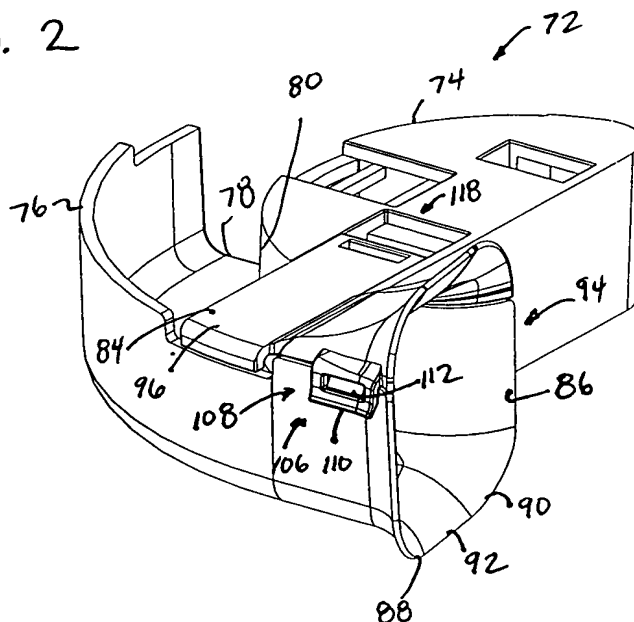


FIG. 6

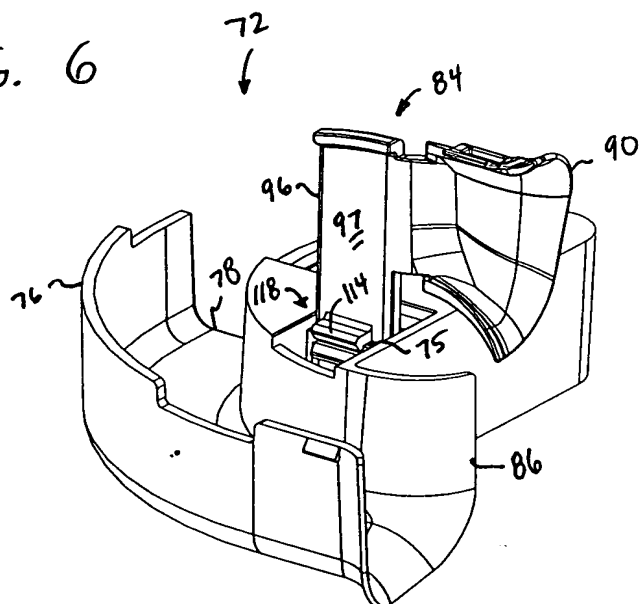

03900465.070601

FIG. 3

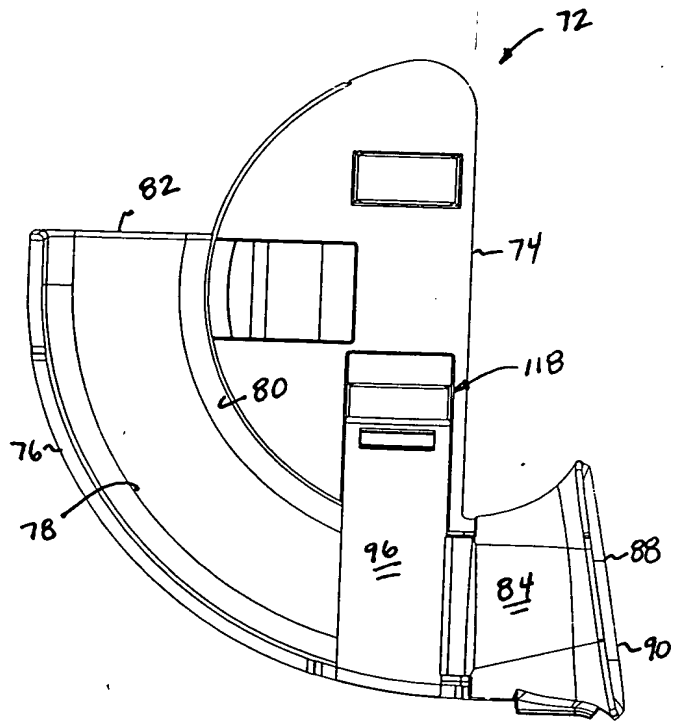


FIG. 4


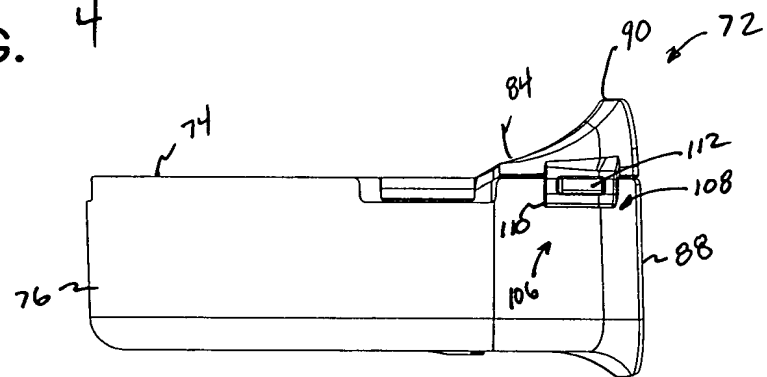


FIG. 5

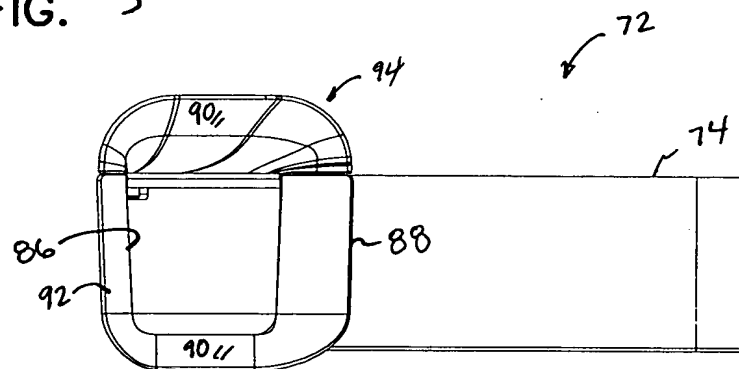

05900465-070601

FIG. 7

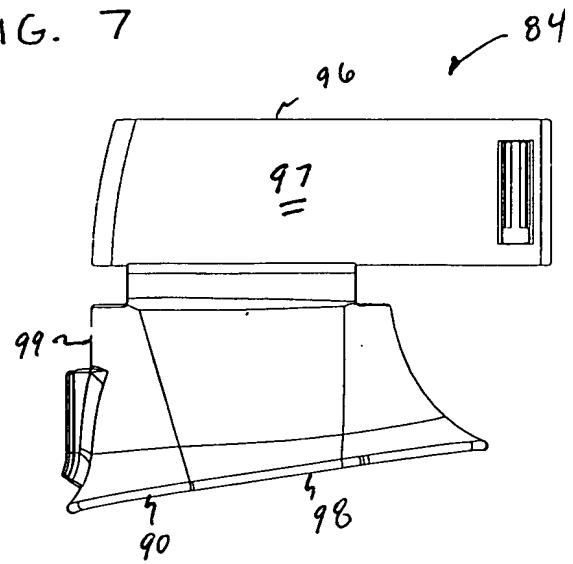


FIG. 9



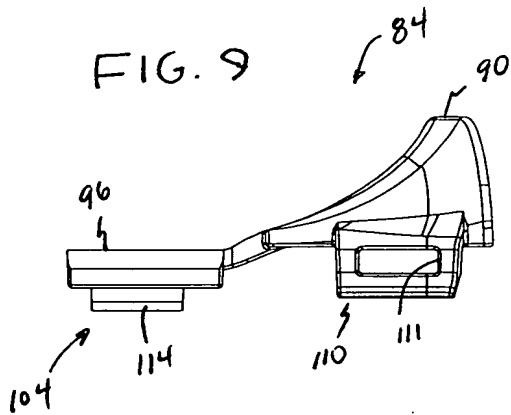


FIG. 8

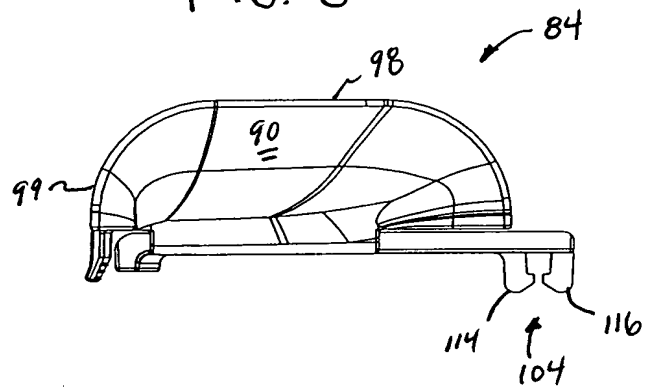


03900465, 070601

FIG. 10

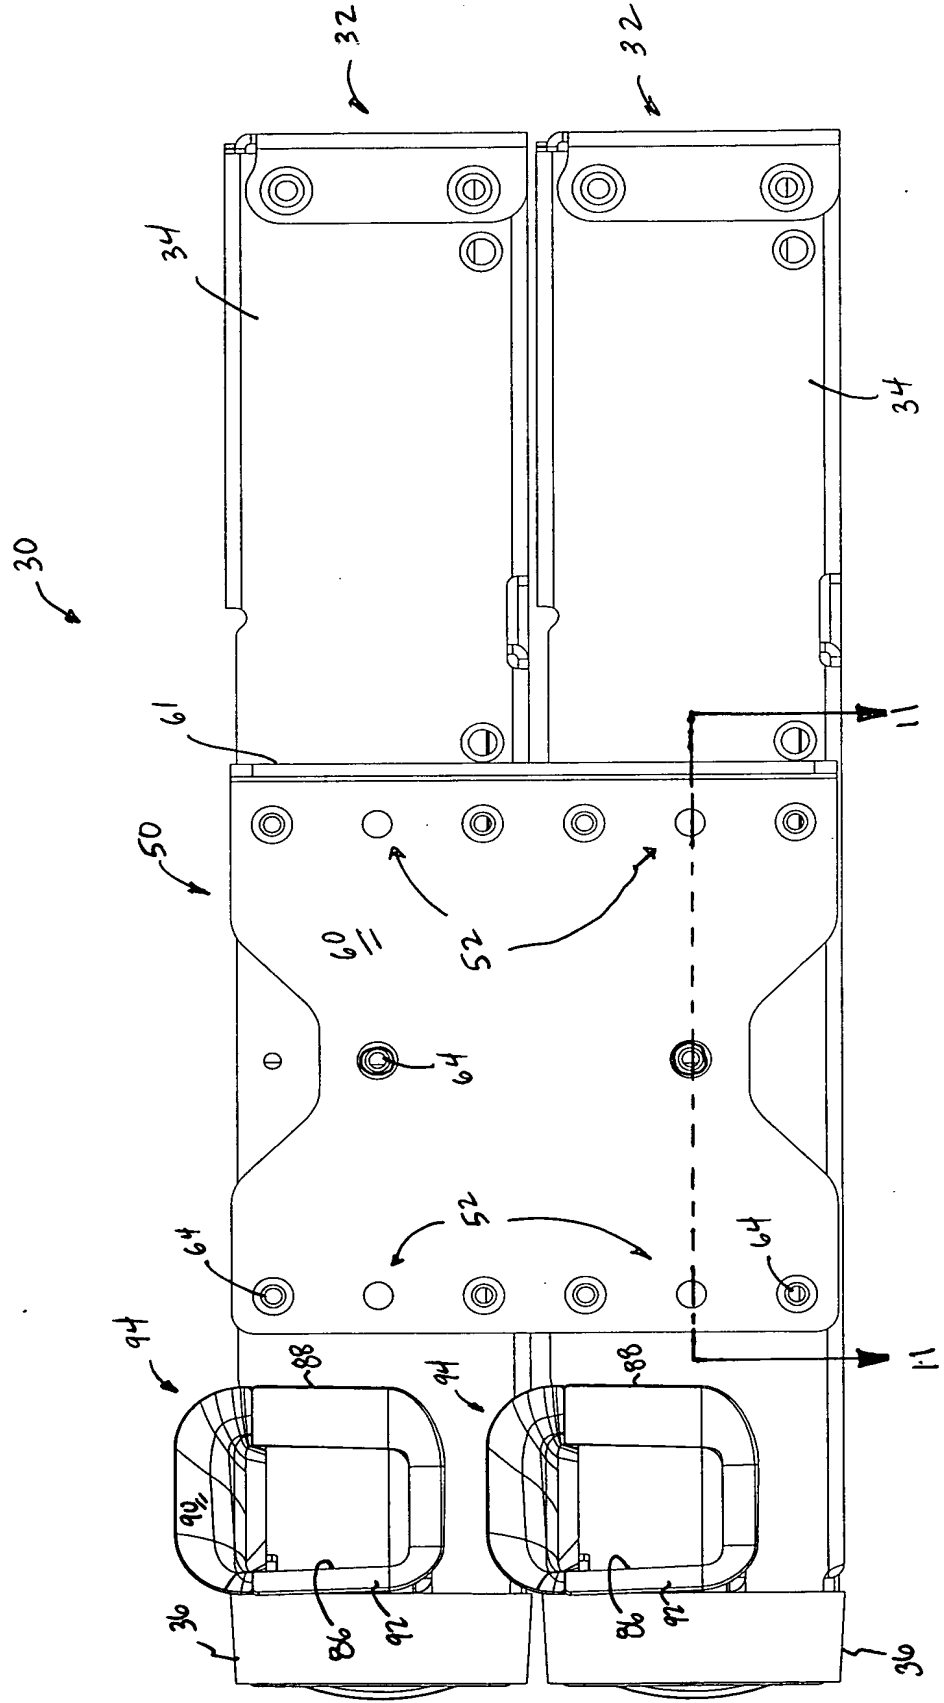

709020" 59400650

FIG. 11

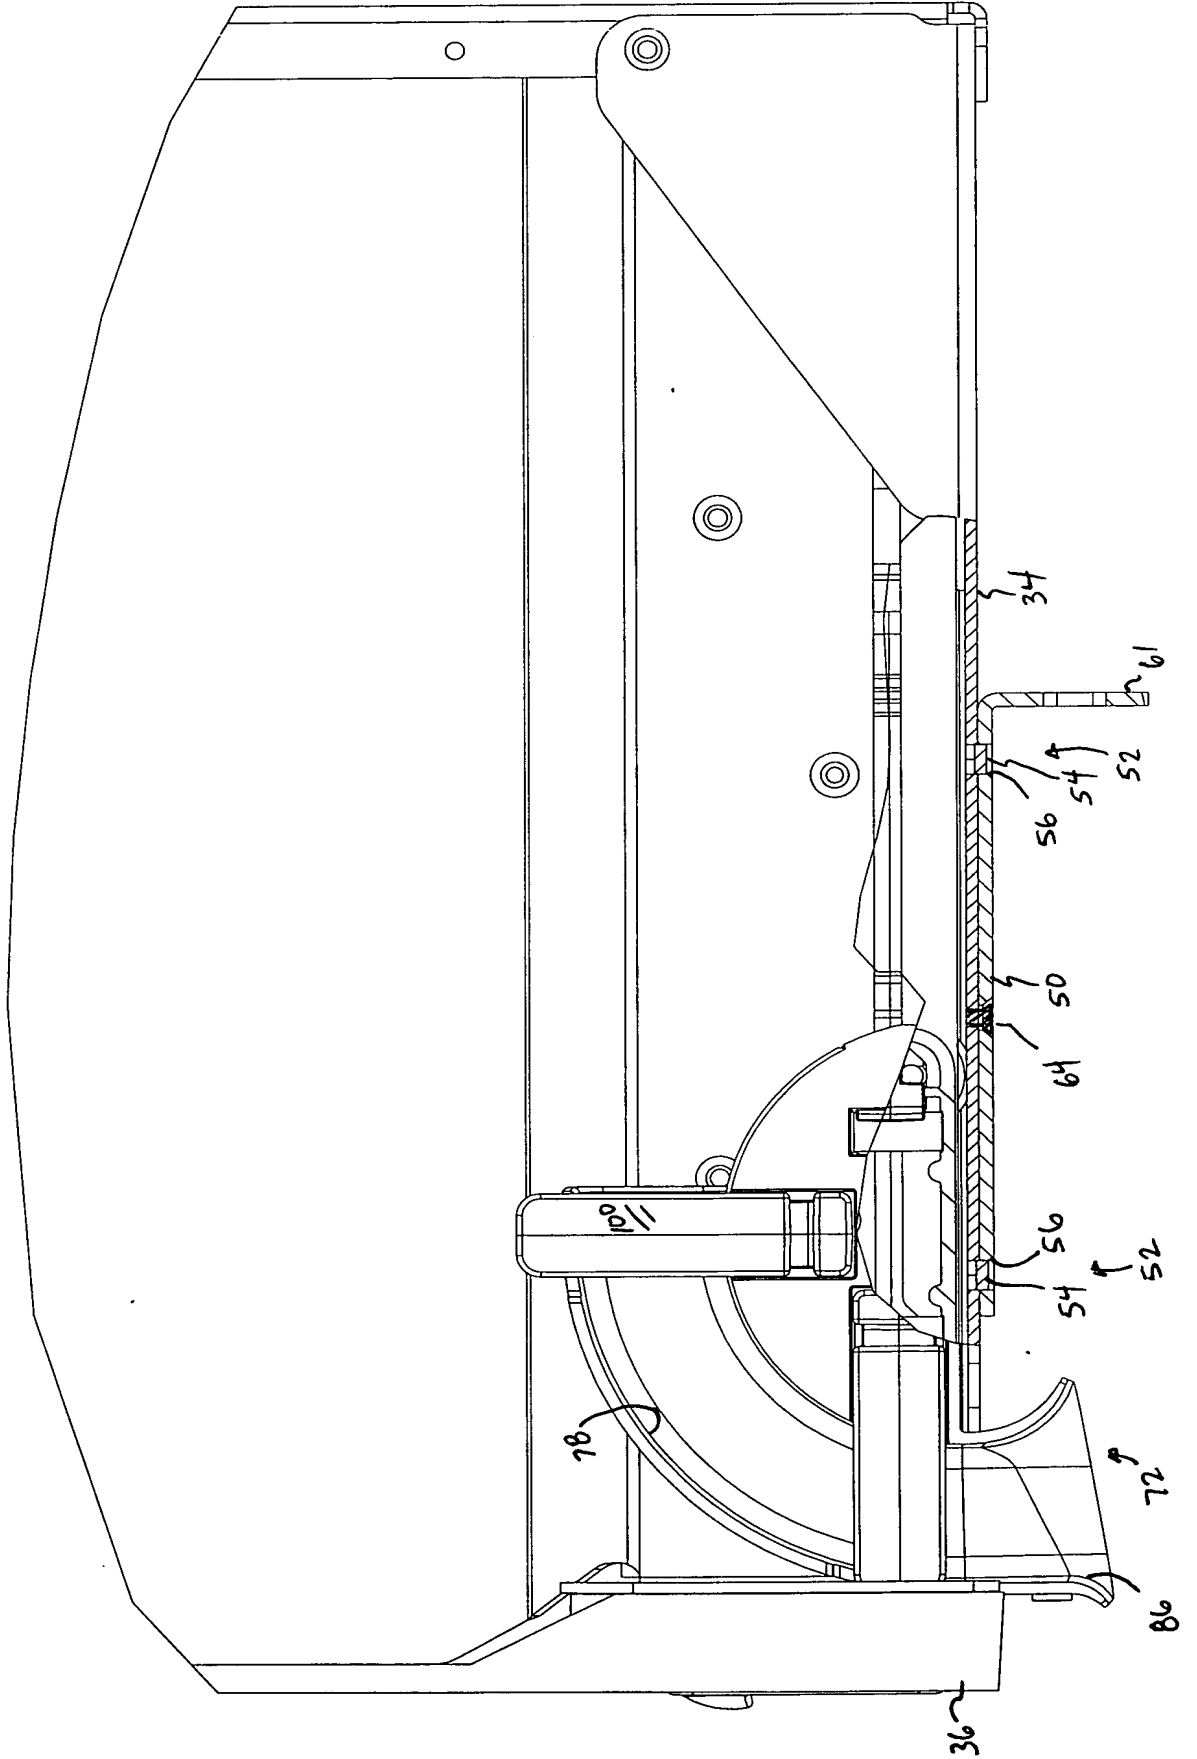

709070" 59400660

FIG. 12

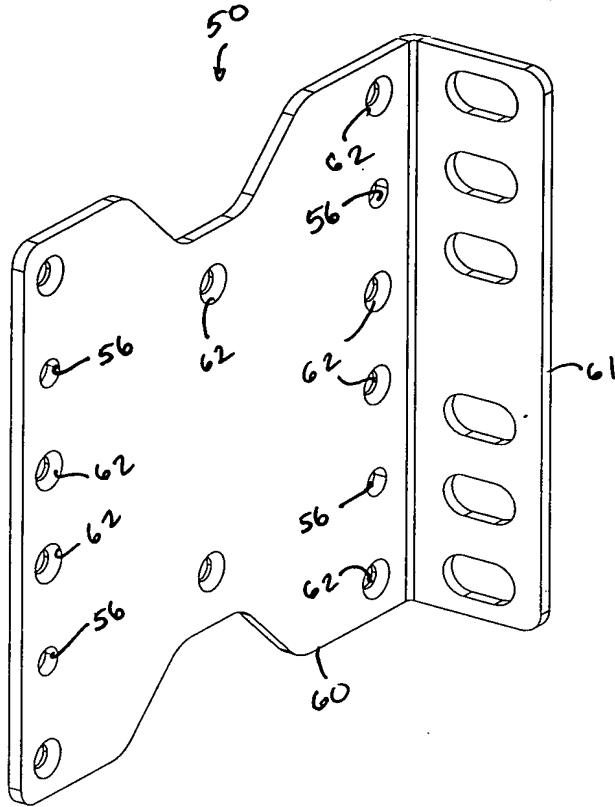


FIG. 13


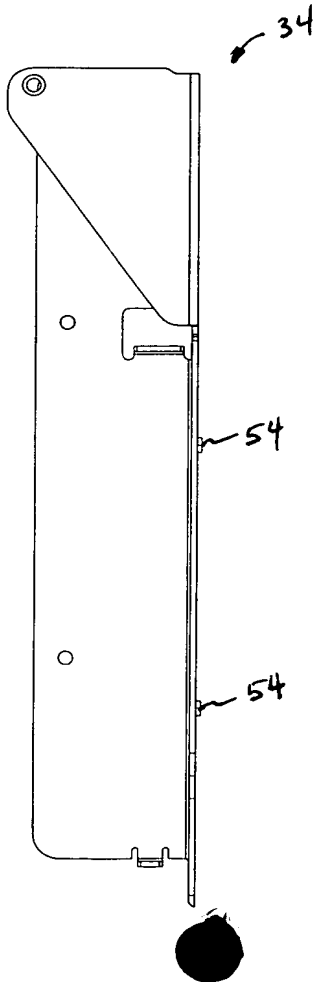


FIG. 14

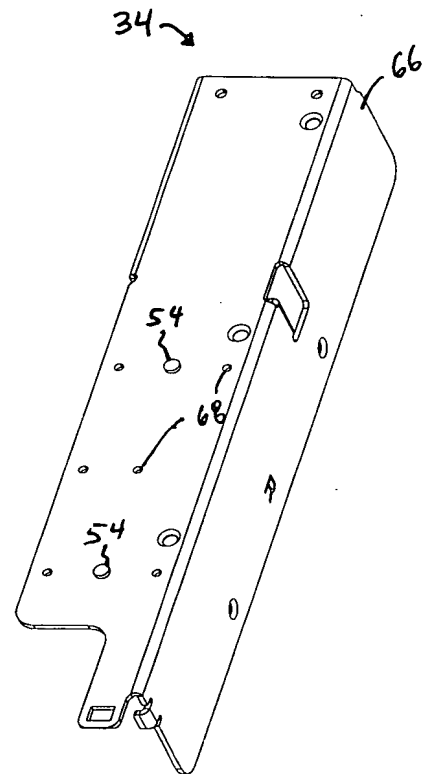

09300465-070601

FIG. 30 shows a perspective view of a second embodiment of the device. It features a main body with a top surface and side walls. The top surface has a central rectangular opening. On the left side, there are two square openings, each containing a circular component. The right side has a large rectangular opening. Various internal components and structural elements are labeled with reference numerals.





FIG. 17



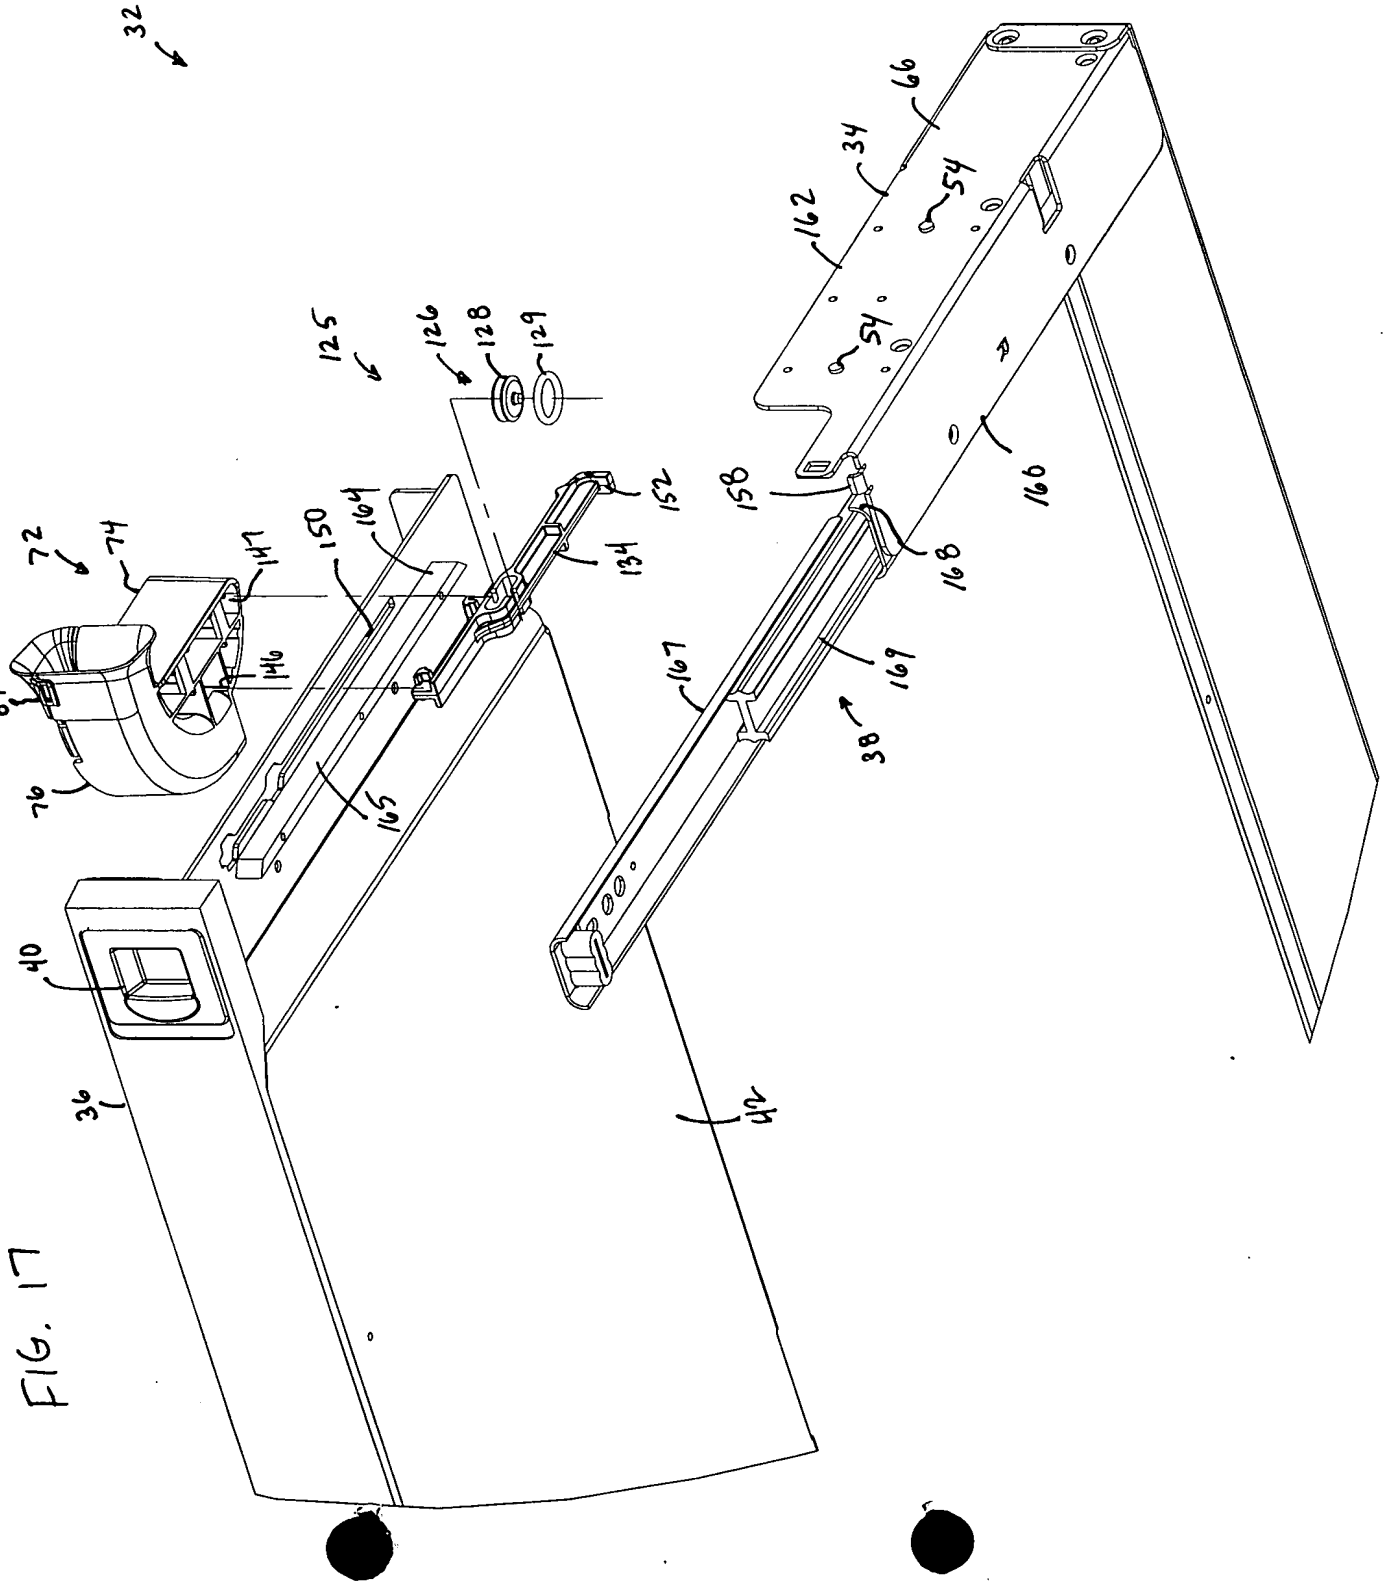


FIG. 18

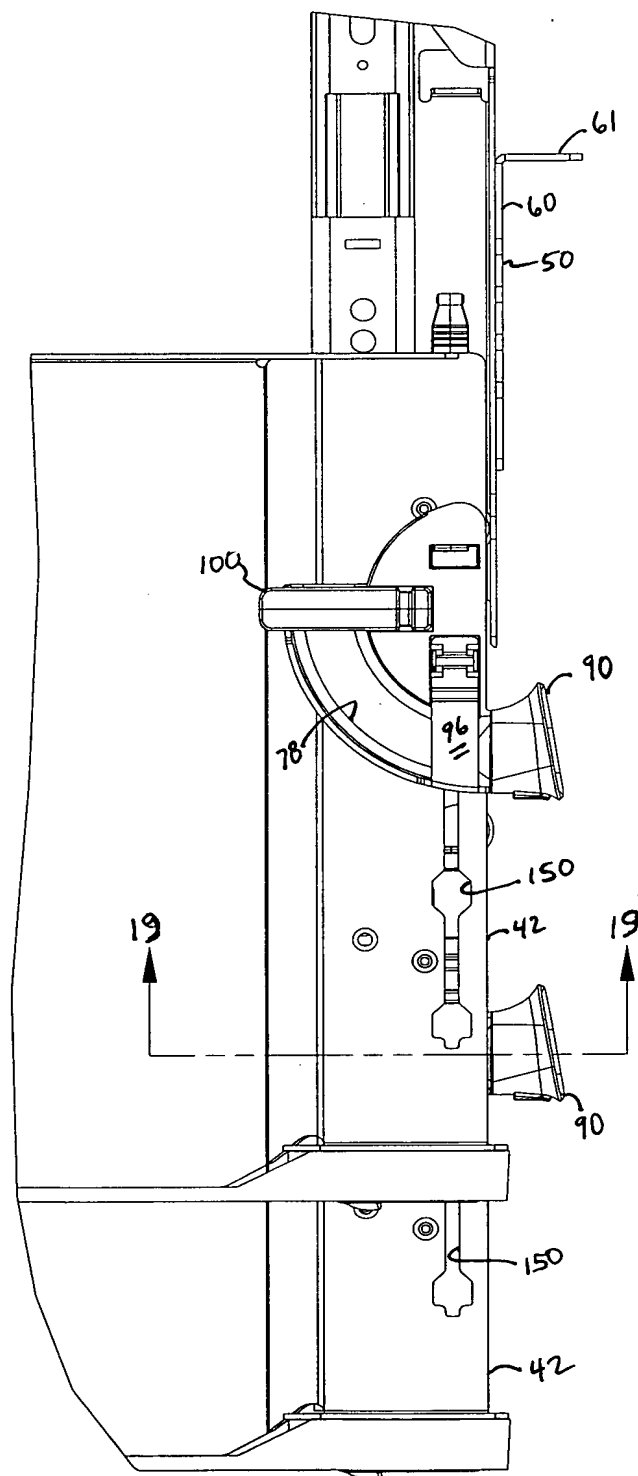

09300465-070601

FIG. 19

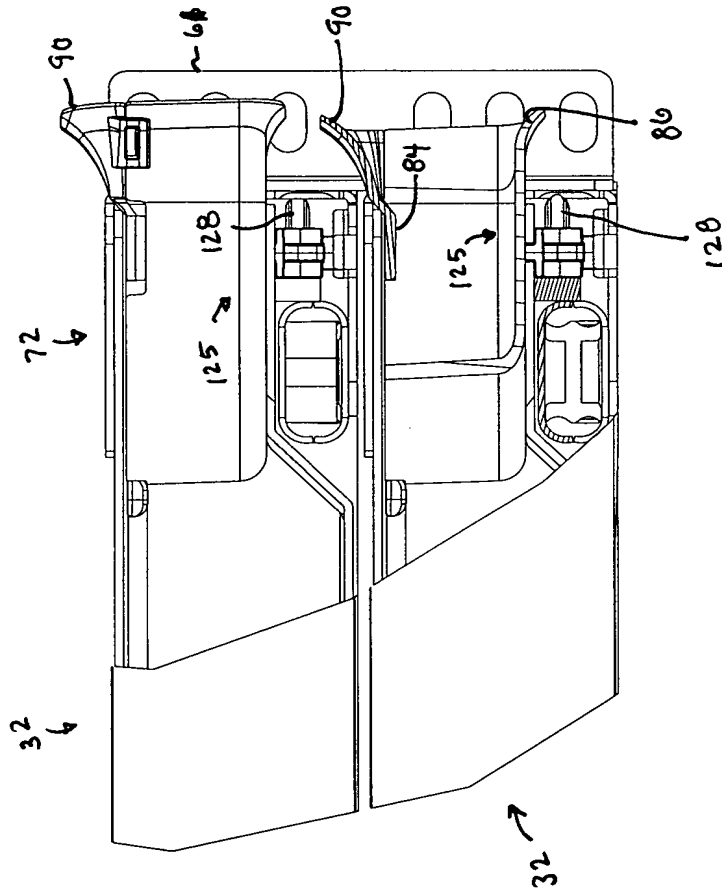

103070" 59700660

709040" 59400660

